



Signaline LocatorPlus-EN

Dual zone monitor module



Compatible with: Signaline FT-88-EN, FT-78-EN
EN54-28:2016 approved

Independent or interlocking modes

Monitors 2 zones of up to 1000m each

Fire
detection



Signaline









Model	Signaline LocatorPlus-EN
Dimensions	180 x 120 x 60.5mm (HxWxD)
IP Rating	IP65
Finish	Light grey with clear lid. Orange faceplate.
Display	2 line, 16 character backlit display with zone status
Approvals	EN54-28:2016, UL File no.: S24913
Operating voltage	12 / 24 / 36Vdc
Operating current	<15mA / <7mA / <5mA
Alarm current	<40mA / <23mA / <15mA
Operating temp. range	-20°C to +50°C (-4°F to +122°F)
Terminal blocks	5mm Rising Clamp
Rating	16A
Wire size	0.08mm ² (28AWG) to 4mm ² (11AWG)
Supervised circuits	Power, Input Zone 1 & Input Zone 2

Inputs

Input	Up to 2 zones (max 1km each); FT-68-EN, FT-68-EN-CAT, FT-68-EN-S, FT-78-EN, FT-78-EN-CAT, FT-78-EN-S, FT-88-EN, FT-88-EN-CAT, FT-88-EN-S
Zone length	1 to 1,000m (3,280ft)
End of Line resistor	3.6kOhm (included)
Short circuit current	0.5mA
Max zone voltage	5V

Outputs

Communications	Two wire RS-485 Modbus RTU
Sounder	2.4kHz 92dBa @ 10cm Buzzer
Alarm	2x Form C volt-free relay contacts (resistive, common) <i>Max V</i> 30Vac or 42.4Vdc <i>Max Current</i> 2A <i>Max Switching Power</i> 60W, 62.5VA
Fault	2x Optoisolated phototransistor output (resistive, common) <i>Max V</i> 35Vdc <i>Max Current</i> 80mA <i>Max Power Dissipation</i> 150mW

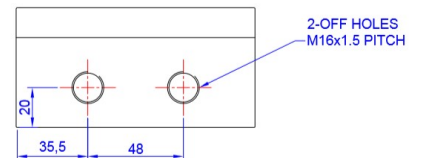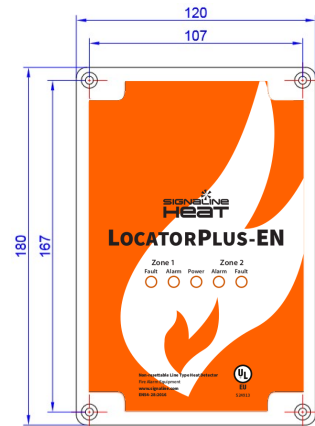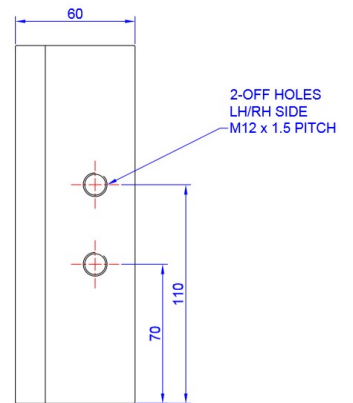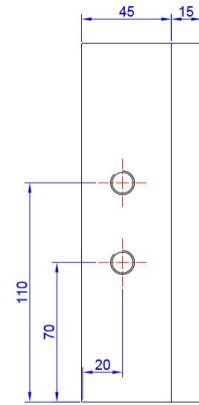

Signaline FT-EN cable is proudly manufactured in the UK