




Signaline FT-105

Fixed Temperature Linear Heat Detector

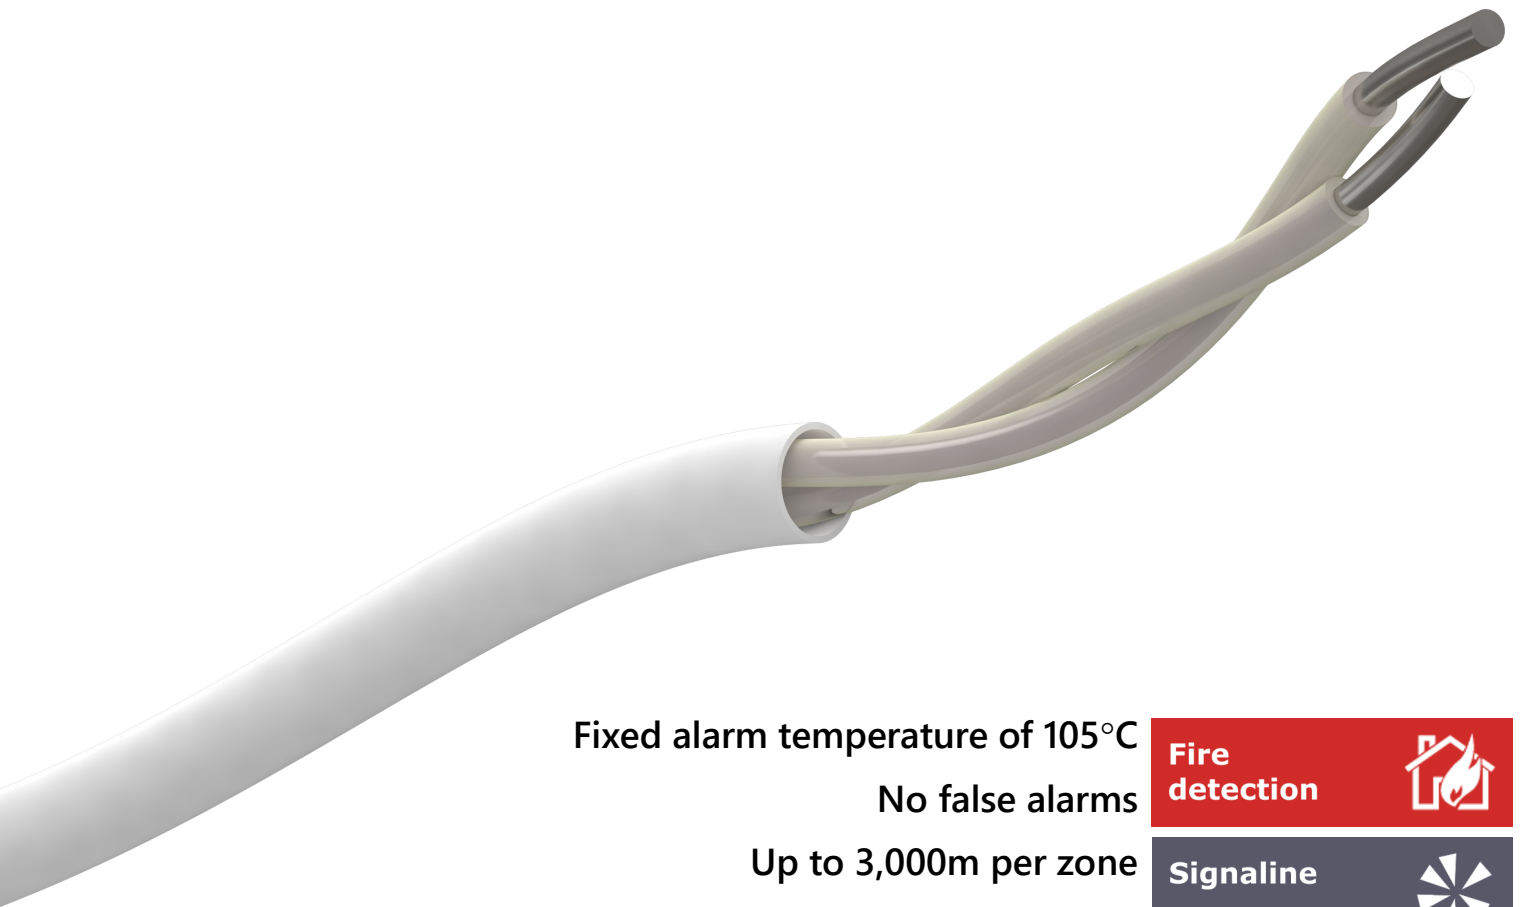

Fixed alarm temperature of 105°C

No false alarms

Up to 3,000m per zone

Multiple fixing options

Fire
detection



Signaline





| | |
|----------------------------------|---------------------------|
| Model | Signaline FT-105 |
| Alarm temperature | 105°C (220°F) |
| Max ambient temp. | 85°C (185°F) |
| Conductor resistance | 0.1Ω/M or 0.029Ω/FT @20°C |
| Max voltage | 42Vdc or 30Vac |
| Dielectric withstand (UL) | 500Vdc |
| Tensile strength | 1700 N/mm ² |
| Minimum bend radius | 75mm |
| Overall diameter | 3.5mm |
| Weight | 13kg/500M |
| Outer sheath material | PVC |
| Colour | White |
| Approvals | FM, UL, cUL, |

Signaline Fixed Temperature Linear Heat Detector (Signaline FT) can detect a build-up of heat anywhere along its length. When any point along the length of the cable reaches a predetermined temperature an alarm is initiated.

Signaline FT is available in multiple temperature settings and outer cover options, making the product suitable for use in a very wide range of applications.


Multiple fixing options and accessories are available.

Visit Signaline.com for our complete catalogue.




Signaline FT cable is proudly manufactured in the UK


Conventional Systems



Addressable Systems

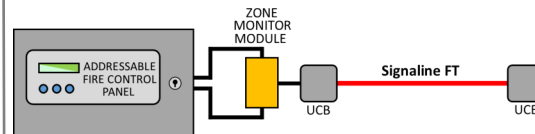

Hazardous Areas

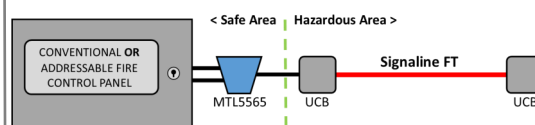

Compatible with the new Signaline LocatorPlus Dual Zone Monitor Module